

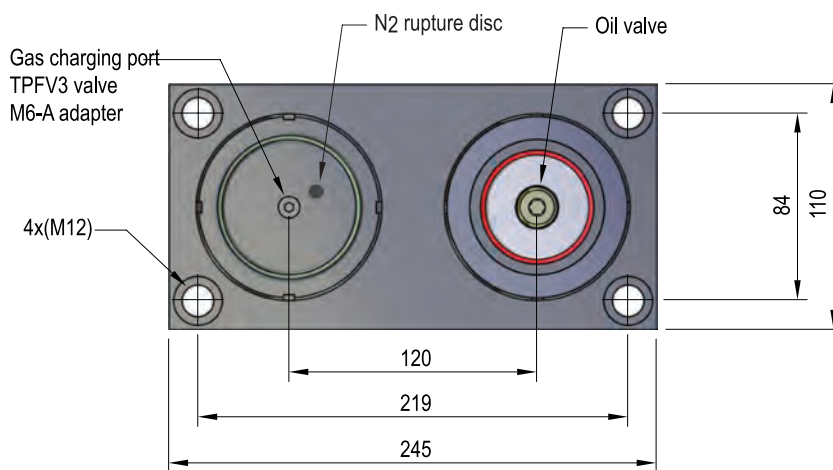


RTCH 7500

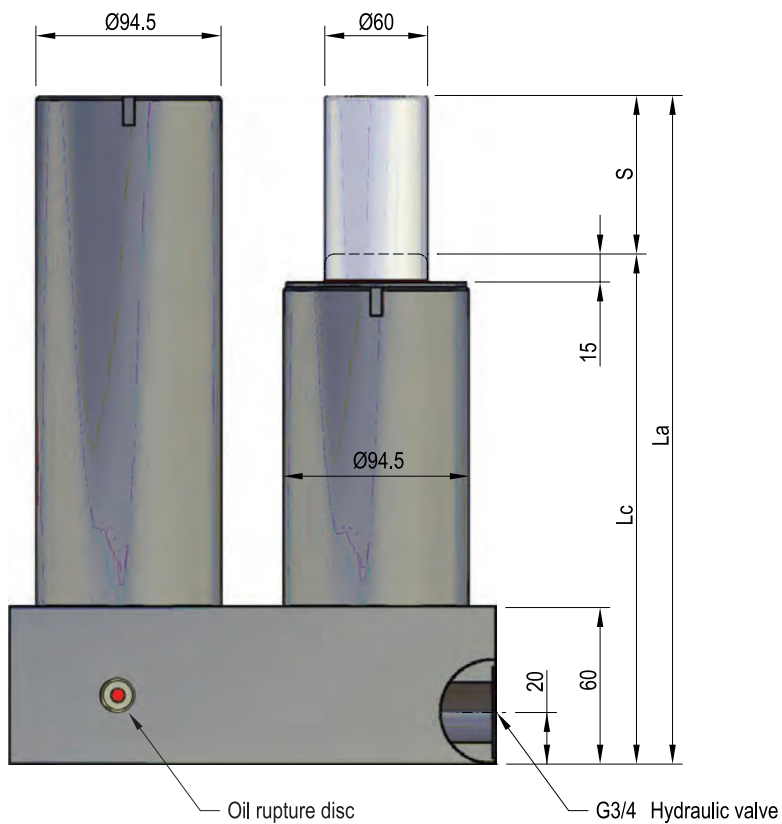

Code	Smax mm	L _a mm	L _c mm	Max. Operation Force	Charging N ₂ Pressure		Max. Working Specs.		Max. Working Temperature
					MIN	MAX	Velocity	Strokes/mm MAX	
RTCH 7500x20	25	205	180	7500 daN	50 Bar	150 Bar	20m/mm	40 spm	60 °C
RTCH 7500x50	50	255	205					30 spm	
RTCH 7500x80	80	315	235					20 spm	

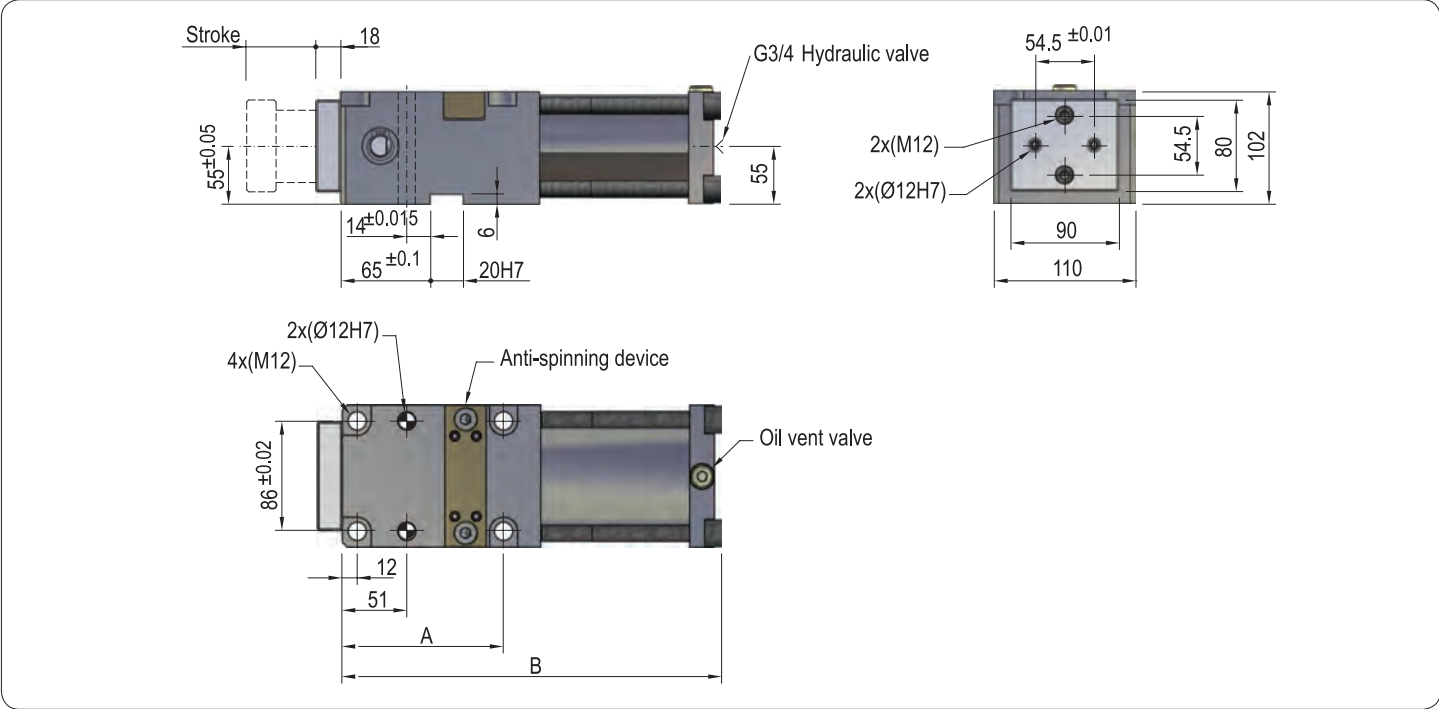

Code	Smax mm	A mm	B mm	Max. Punching Force	Gas Spring Force Initial	Gas Spring Force Final	Gas Spring Model	Max. Working Specs. Velocity	Strokes/mm MAX	Application
RTCH 7500x25	25	110	230	7500 daN	600 daN	≈860daN	TPK 600x25	20m/mm	40 spm	Round and Shaped
RTCH 7500x50	50	110	255				TPK 600x50		30 spm	
RTCH 7500x80	80	140	315				TPK 600x80		20 spm	

Working Angle

The working cam can work freely in space, at any angle and in any position.

