
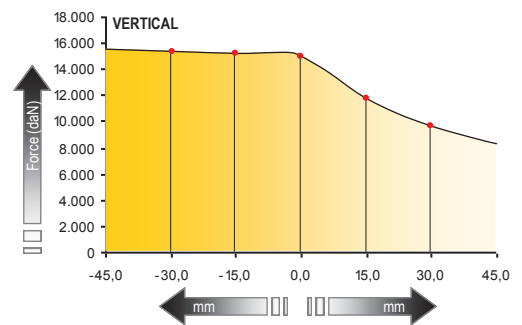



Model	A mm	B mm	C mm
RTRCS 15000x50	190	56	88
RTRCS 15000x80	220	86	118
RTRCS 15000x100	260	126	158


Model	Smax mm	Max. punching force	Gas spring return force		Gas spring model	Max. working specifications		Max. width of driver	
			Initial	Final		Velocity	Strokes / min		
RTRCS 15000x50	50	15000 daN	400 daN	≈ 580 daN	2x TPC 25x50	0,5 m/s	35	26,3	
RTRCS 15000x80	80						25		65 mm
RTRCS 15000x100	100						20		

Working Force Distribution

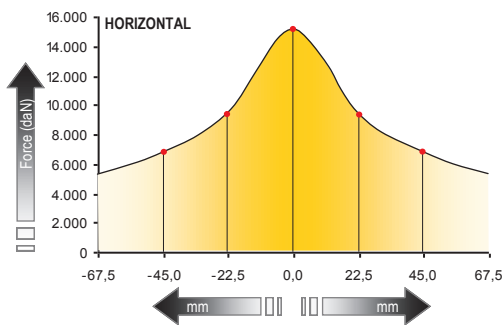

Maximum force that can be applied to the punch depending on eccentricity, so that the stress in the assembly is the same as it was when the punch was completely centered.

Maximum Incline

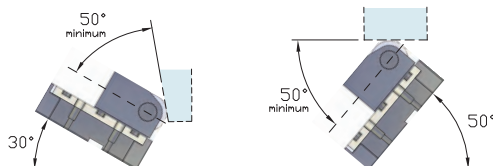

How to order

RTRCS 15000	x	100
Model		Stroke