

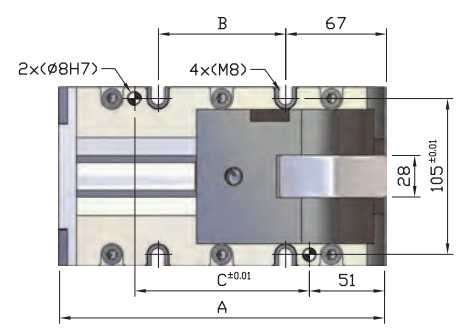
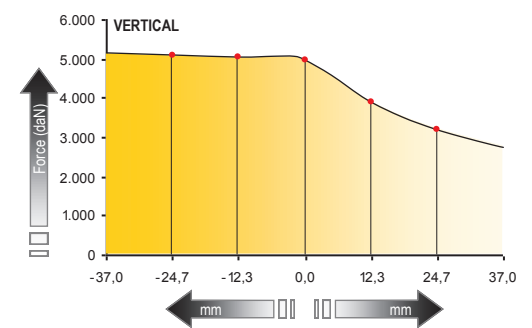


Model	A mm	B mm	C mm	D mm	E mm
RTRCS 5000x50	190	56	88	103	140
RTRCS 5000x80	220	86	118	103	140
RTRCS 5000x100	260	126	158	120	157




Model	Smax mm	Max. punching force	Gas spring return force		Gas spring model	Max. working specifications		Max. width of driver	Kg	
			Initial	Final		Velocity	Strokes / min			
RTRCS 5000x50-1	50	5000 daN	400 daN	≈ 600 daN	TPK 32x50	0,5 m/s	40	40 mm	14,20	
RTRCS 5000x50-2			200 daN	≈ 270 daN	TPS 32x50					
RTRCS 5000x80-1	80		400 daN	≈ 600 daN	TPK 32x80		35			
RTRCS 5000x80-2			200 daN	≈ 270 daN	TPS 32x80					
RTRCS 5000x100-1	100		400 daN	≈ 600 daN	TPK 32x100		25			21,00
RTRCS 5000x100-2			200 daN	≈ 270 daN	TPS 32x100					

## Working Force Distribution

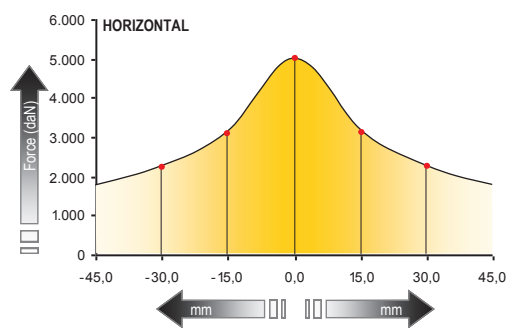

Maximum force that can be applied to the punch depending on eccentricity, so that the stress in the assembly is the same as it was when the punch was completely centred.

## Maximum Incline

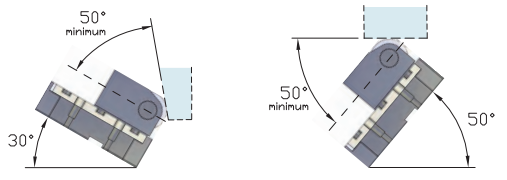

## How to order

<b>RTRCS 5000</b>	x	<b>80</b>	-	<b>2</b>
Model		Stroke		Gas spring model

1 - TPK series  
2 - TPS series